


Panel mounted receptacle

Part number: 75246

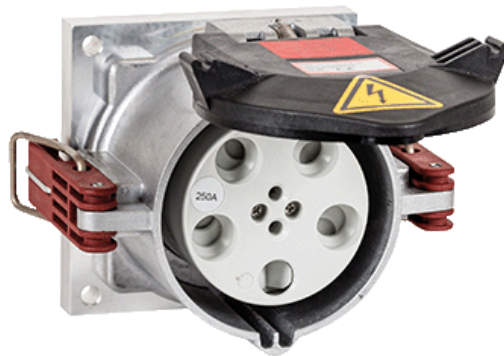

MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- EcoLine
- aluminium enclosure
- nickel plated contacts, highly heat resistant contact carrier
- straight insertion direction
- sea water products are available on request
- if required, pilot cables can be introduced separately into enclosures, please add "PK" to the part number

Technical Details

Panel mounted receptacle	75246
Ampere	200A
Number of poles	5p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP67
Contact carrier	nickel plated contacts, highly heat resistant contact carrier
X-CONTACT	no
Connection	cage terminals
Contact screw drive	allen key
Pilot contact	2 pilot contacts
Pilot contact switch	no
Flange dimensions	140 x 140 mm
Hole spacings	120 x 120 mm
Insertion direction	straight
Highly resistant to chemicals	no
Military version	no
Tightening torque connection terminal	8 Nm
Strip length jacket	150 mm
Strip length solid conductor	30 mm
Conductor cross-section min.	35 mm ²
Conductor cross-section max.	150 mm ²
Conductor cross-section pilot max.	4 mm ²

Panel mounted receptacle	75246
Weight (net)	3200 g
Packaging unit	1 pcs
Quantity per pallet	132 pcs
EAN / identification number	4015394055624

Permissible ambient conditions

	Min.	Max.
Permissible ambient temperature	-40 °C	100 °C

Material properties

Housing	aluminium grey [no RAL colour code]
Front part	aluminium grey [no RAL colour code]
Hinged lid	plastic black [no RAL colour code]

Material resistance

The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.


Material and environmental properties

RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

Regulations and Standards

Norm	DIN EN IEC 60309
Declaration of Conformity	CE
Test label	EAC

Dimensional Drawing

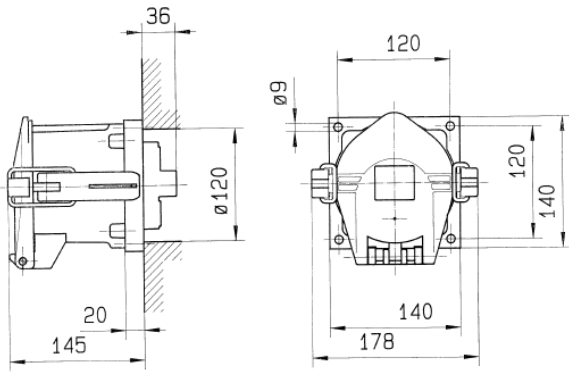

Drawing
1 MB 384

Dim. in mm